

PLATFORM SCALES

5g to 1ton


Features :

- ♦ Indicator housed in a sturdy metal enclosure.
- ♦ Bright LED display.
- ♦ Multiple functions: Parts counting, accumulation, net/gross.
- ♦ Standard bi-directional RS-232 interface.
- ♦ Overload & shock load protection.
- ♦ Bright Red LED display.
- ♦ High bright green LED display (optional).
- ♦ Battery backup (optional).
- ♦ Rechargeable sealed maintenance free battery.
- ♦ Ethernet Connectivity-devices to connect to a wired network using Ethernet technology.



Specifications :

Models	CP-100K10
Capacity	100kg
Readability	10g
Platform Sizes(mm)	600x600

Taring Range : Up to full capacity
Response time : 3-5 secs
Power Req : 90-250V, 50/60Hz, 10 Watt
Operating Temperature : 10 to 45 deg C

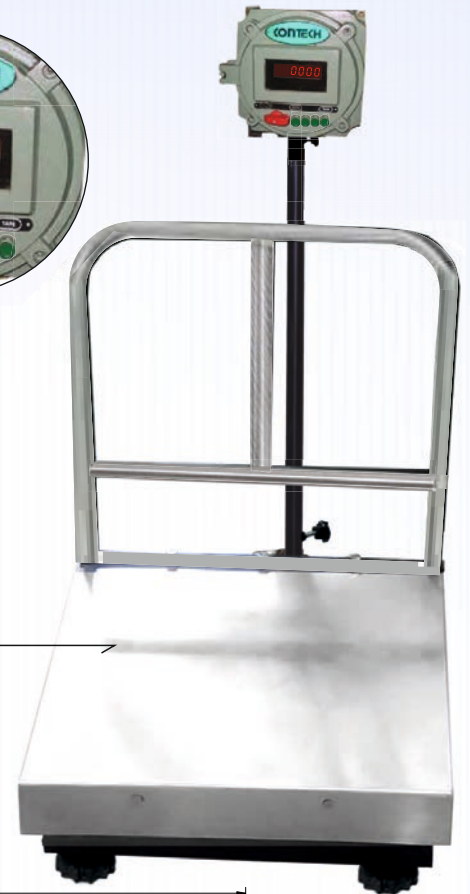

S S 304 Pan

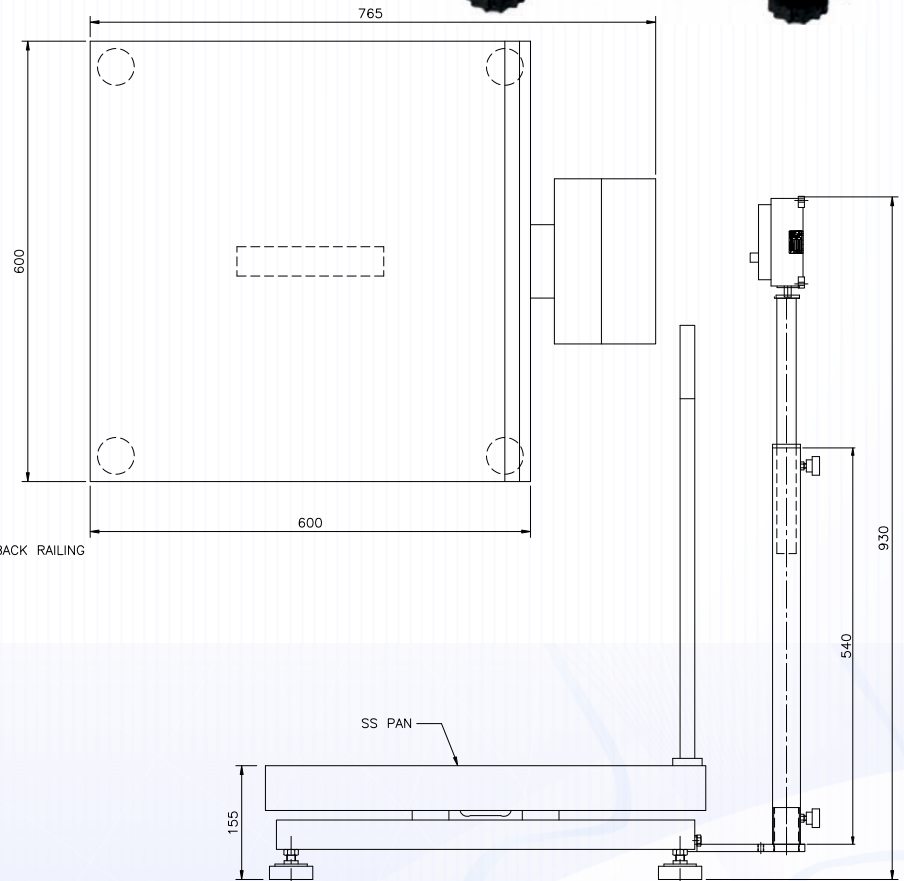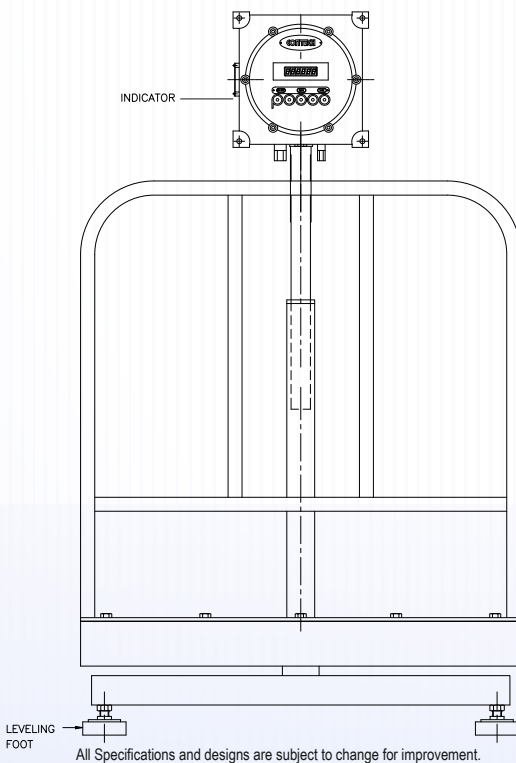

All Specifications and designs are subject to change for improvement.



301, Punit Indl. Premises, Turbhe Naka, Navi Mumbai - 400 705.
Tel. : +91 22 6139 3000 (100 lines)
E-mail : sales@contechindia.in
Website : www.contechindia.com

FACTORY / NABL LAB



Plot No. EL-221 TTC Indl. Area, MIDC (Electronic Zone),
Mhape, Navi Mumbai - 400 710.

Impeccable Credentials



PLATFORM SCALES

5g to 1ton


Features :

- ♦ Indicator housed in a sturdy metal enclosure.
- ♦ Bright LED display.
- ♦ Multiple functions: Parts counting, accumulation, net/gross.
- ♦ Standard bi-directional RS-232 interface.
- ♦ Overload & shock load protection.
- ♦ Bright Red LED display.
- ♦ High bright green LED display (optional).
- ♦ Battery backup (optional).
- ♦ Rechargeable sealed maintenance free battery.
- ♦ Ethernet Connectivity-devices to connect to a wired network using Ethernet technology.


Specifications :

Models	CP-200K20
Capacity	200kg
Readability	20g
Platform Sizes(mm)	600x600


Taring Range : Up to full capacity
Response time : 3-5 secs
Power Req : 90-250V, 50/60Hz, 10 Watt
Operating Temperature : 10 to 45 deg C

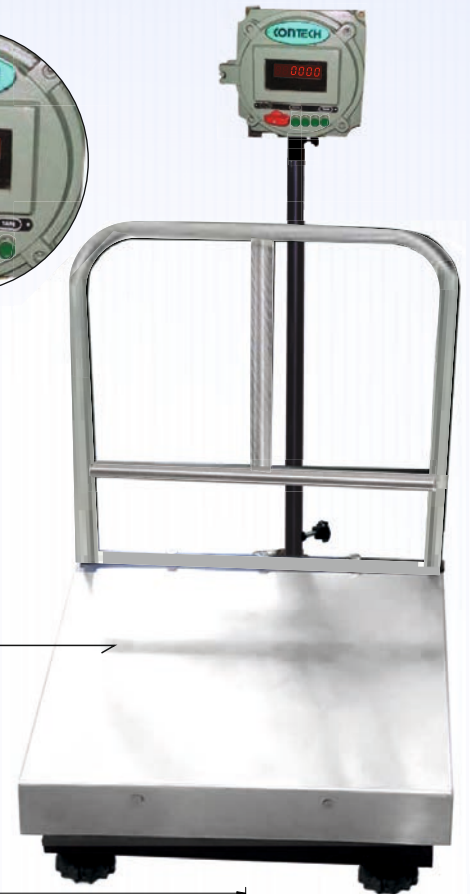

S S 304 Pan

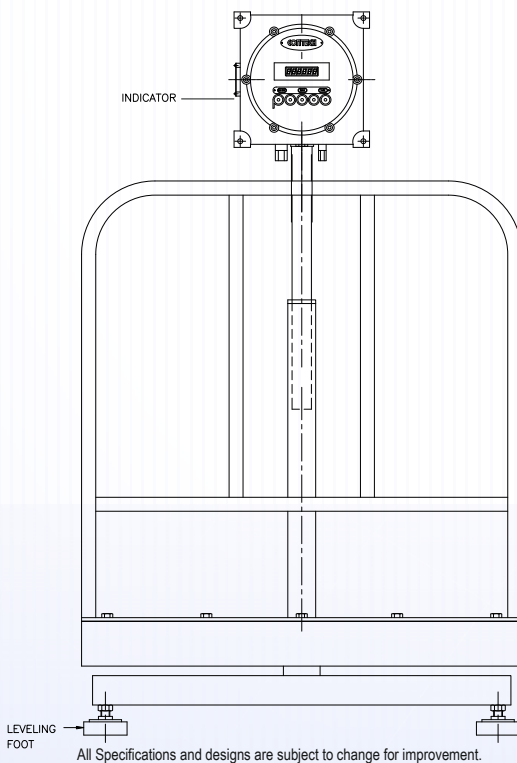

LEVELING FOOT
All Specifications and designs are subject to change for improvement.

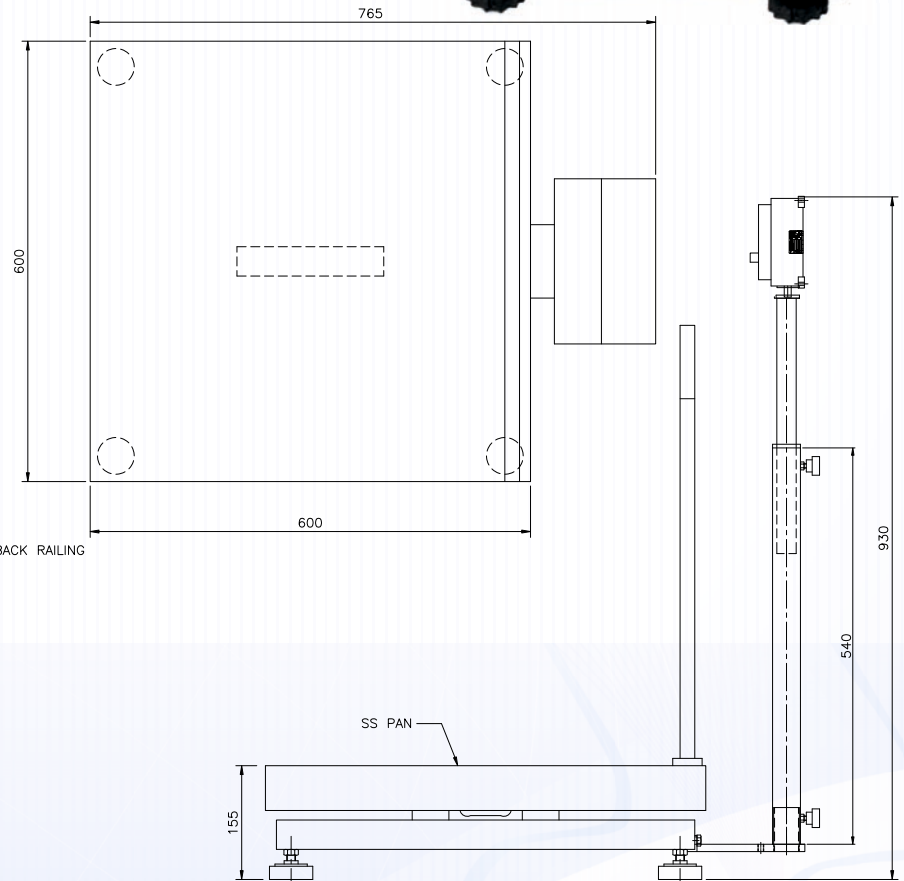

FACTORY / NABL LAB



Plot No. EL-221 TTC Indl. Area, MIDC (Electronic Zone),
Mhape, Navi Mumbai - 400 710.



301, Punit Indl. Premises, Turbhe Naka, Navi Mumbai - 400 705.
Tel. : +91 22 6139 3000 (100 lines)
E-mail : sales@contechindia.in
Website : www.contechindia.com

Impeccable Credentials



PLATFORM SCALES

5g to 1ton


Features :

- ♦ Indicator housed in a sturdy metal enclosure.
- ♦ Bright LED display.
- ♦ Multiple functions: Parts counting, accumulation, net/gross.
- ♦ Standard bi-directional RS-232 interface.
- ♦ Overload & shock load protection.
- ♦ Bright Red LED display.
- ♦ High bright green LED display (optional).
- ♦ Battery backup (optional).
- ♦ Rechargeable sealed maintenance free battery.
- ♦ Ethernet Connectivity-devices to connect to a wired network using Ethernet technology.


Specifications :

Models	CP-300K20
Capacity	300kg
Readability	20g
Platform Sizes(mm)	600x600


Taring Range : Up to full capacity
Response time : 3-5 secs
Power Req : 90-250V, 50/60Hz, 10 Watt
Operating Temperature : 10 to 45 deg C

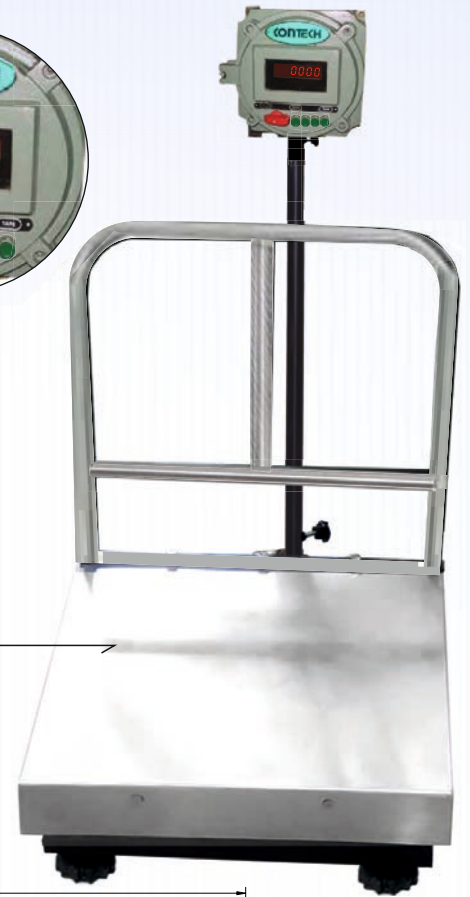

S S 304 Pan

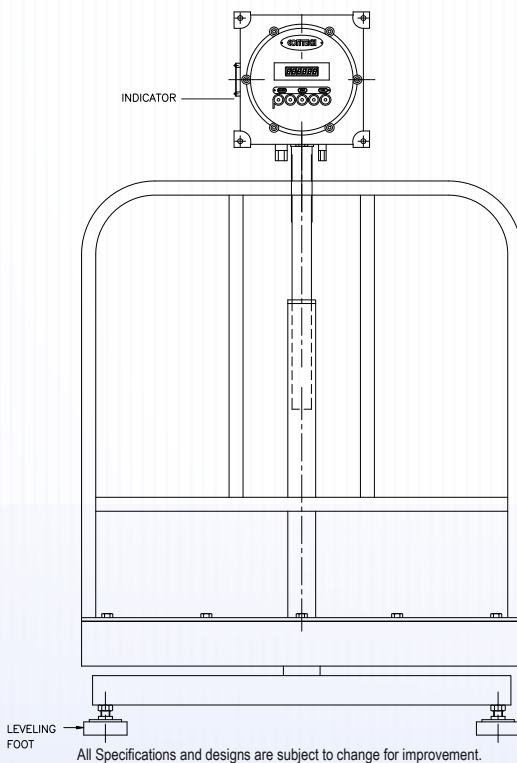

LEVELING FOOT
All Specifications and designs are subject to change for improvement.

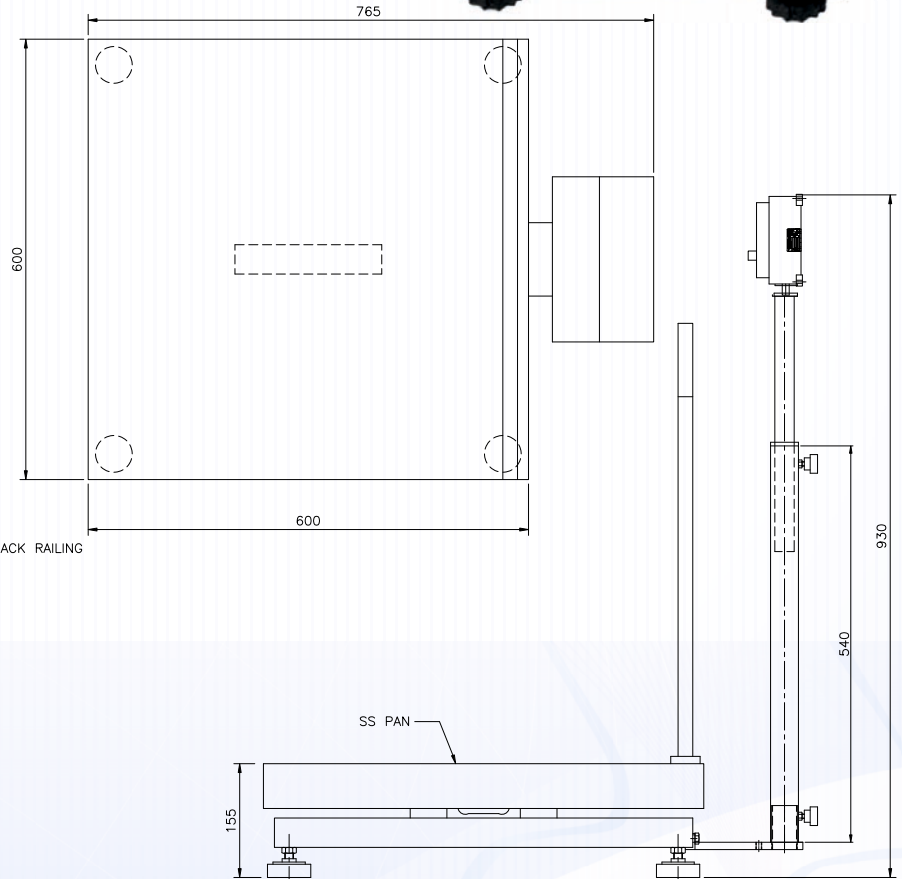

FACTORY / NABL LAB



Plot No. EL-221 TTC Indl. Area, MIDC (Electronic Zone),
Mhape, Navi Mumbai - 400 710.



301, Punit Indl. Premises, Turbhe Naka, Navi Mumbai - 400 705.
Tel. : +91 22 6139 3000 (100 lines)
E-mail : sales@contechindia.in
Website : www.contechindia.com

Impeccable Credentials



PLATFORM SCALES

5g to 1ton

Features :

- ♦ Indicator housed in a sturdy metal enclosure.
- ♦ Bright LED display.
- ♦ Multiple functions: Parts counting, accumulation, net/gross.
- ♦ Standard bi-directional RS-232 interface.
- ♦ Overload & shock load protection.
- ♦ Bright Red LED display.
- ♦ High bright green LED display (optional).
- ♦ Battery backup (optional).
- ♦ Rechargeable sealed maintenance free battery.
- ♦ Ethernet Connectivity-devices to connect to a wired network using Ethernet technology.


Specifications :

Models	CP-500K50
Capacity	500kg
Readability	50g
Platform Sizes(mm)	600x600


Taring Range : Up to full capacity
Response time : 3-5 secs
Power Req : 90-250V, 50/60Hz, 10 Watt
Operating Temperature : 10 to 45 deg C



S S 304 Pan

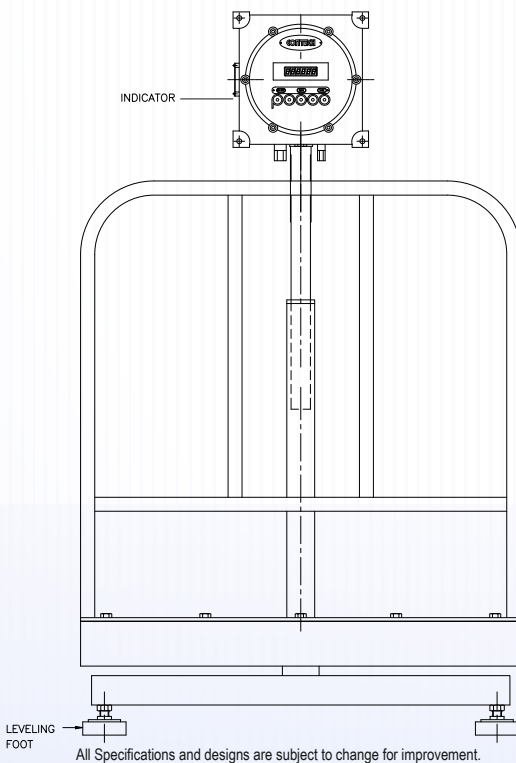

All Specifications and designs are subject to change for improvement.

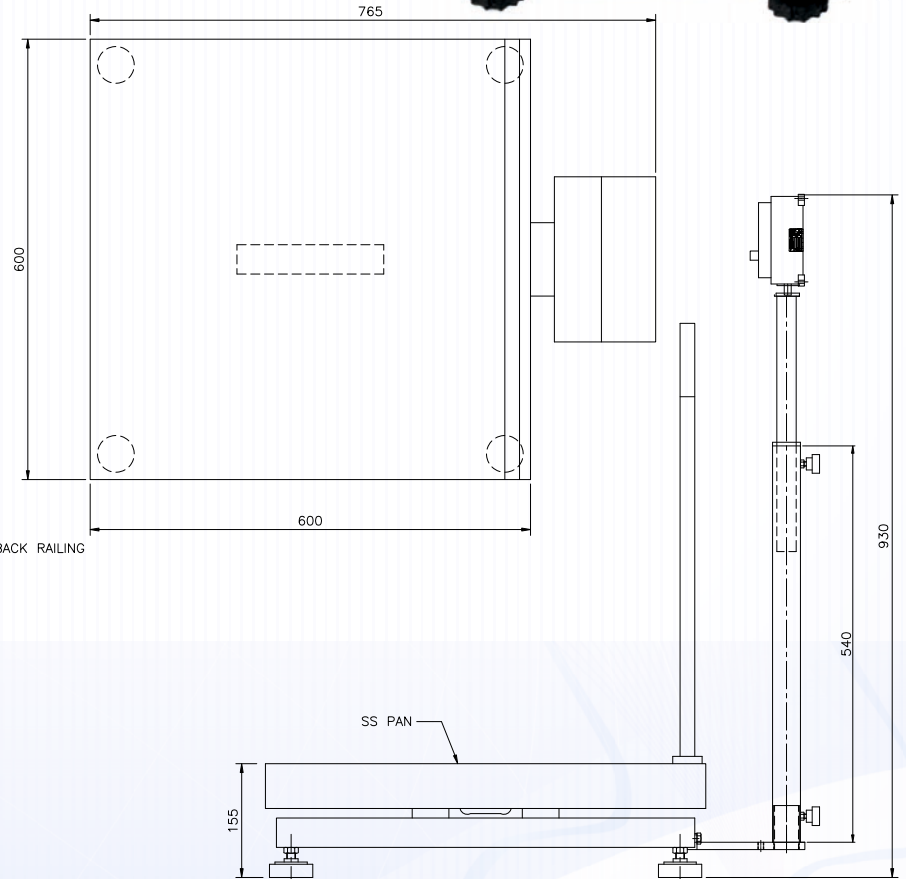

FACTORY / NABL LAB



301, Punit Indl. Premises, Turbhe Naka, Navi Mumbai - 400 705.
Tel. : +91 22 6139 3000 (100 lines)
E-mail : sales@contechindia.in
Website : www.contechindia.com



Plot No. EL-221 TTC Indl. Area, MIDC (Electronic Zone),
Mhape, Navi Mumbai - 400 710.

Impeccable Credentials



PLATFORM SCALES

5g to 1ton



Features :

- ♦ Indicator housed in a sturdy metal enclosure.
- ♦ Bright LED display.
- ♦ Multiple functions: Parts counting, accumulation, net/gross.
- ♦ Standard bi-directional RS-232 interface.
- ♦ Overload & shock load protection.
- ♦ Bright Red LED display.
- ♦ High bright green LED display (optional).
- ♦ Battery backup (optional).
- ♦ Rechargeable sealed maintenance free battery.

Specifications :

Models	CP-100K10
Capacity	100kg
Readability	10g
Platform Sizes(mm)	600x600

Taring Range : Up to full capacity
Response time : 3-5 secs
Power Req : 90-250V, 50/60Hz, 10 Watt
Operating Temperature : 10 to 45 deg C

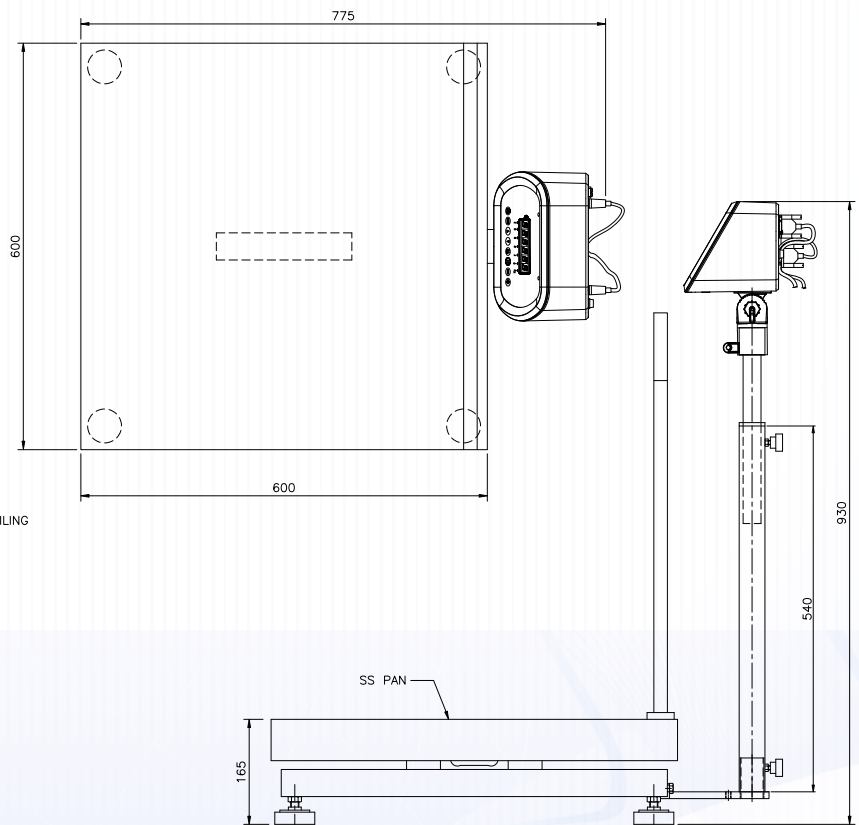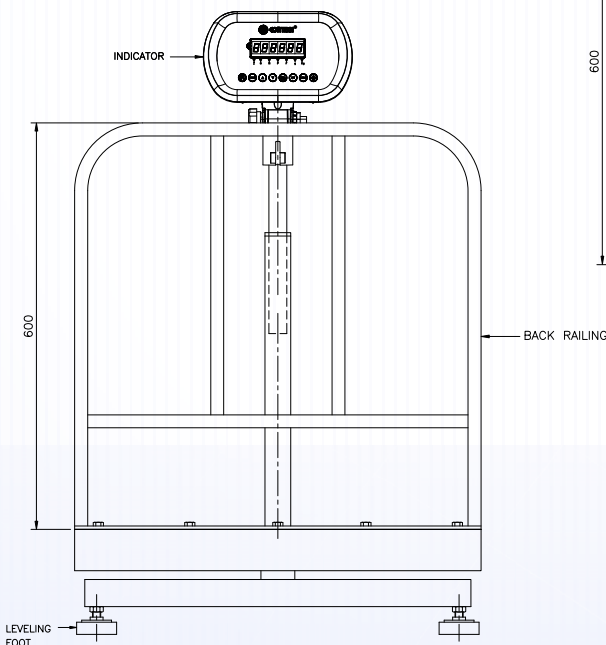

All Specifications and designs are subject to change for improvement.



301, Punit Indl. Premises, Turbhe Naka, Navi Mumbai - 400 705.
Tel. : +91 22 6139 3000 (100 lines)
E-mail : sales@contechindia.in
Website : www.contechindia.com

FACTORY / NABL LAB



Plot No. EL-221 TTC Indl. Area, MIDC (Electronic Zone),
Mhape, Navi Mumbai - 400 710.

Impeccable Credentials

