


ANALYTICAL (Indirect Loading) BALANCES

0.00001g to 300g

CONTECH® High Precision Balances incorporate advanced Electro Magnetic Force Compensation (EMFC) technology for offering unmatched accuracy and reliability, coupled with unique ADC circuit with inbuilt temperature compensation to offer a very high stability upto a resolution of 6 million counts. All adjustment parameters are programmable to take care of any minor mismatch of different sub assemblies & Balances are configured with these parameters.



Advanced EMFC Transducer

Standard Features

Backlite LCD Display

Customized, large, attractive LCD with multiparameter display illuminated by white backlite.

Bi directional RS 232 interface

RS 232 port with selectable baud rate 4800,9600. Various interface formats adopting this Balance in a setup to replace any other leading international brand Balance. Can be configured for an USB interface using optional RS 232 to USB converter.

GSM function

GSM function for paper & cloth quality checking.

Multiple Weighing Units

Grams, Ounces, Troy Ounces, Carats, Mommies, Pennyweights, Grains, tola, Mesghal, Chinese tael.

Percentage Weighing

Display of Reference weight, sample weight, % of sample with respect to reference weight

Piece Counting

Parts calibration using preset quantity of samples or programmable quantity. Automatic count correction for precise calibration.

Fill Mode

1 set point - Indication when sample weight exceeds the set limit.
2 set points - Indication when the sample weight is between the lower & upper limits.

Accumulation

Storage of maximum 200 samples.

Multiple Printing Mode

0,1,2,3 modes for various formats. Pause in case data storage capacity in a Printer is less.

External Calibration

Using preset weights.
Known weights can be corrected to ± 15 counts.

Response Time:

User selectable - Slow / Normal /Fast.

Stability Band Width

Stability indicator appears on display with counts variation ± 1 , ± 2 , ± 3 , ± 4 .

Auto Zero Tracking



User selectable 0,1,2,3

Return to Zero Tracking




Variable: 0,1,2,3,4

Display Updation

Speed setting : Fast / Normal.

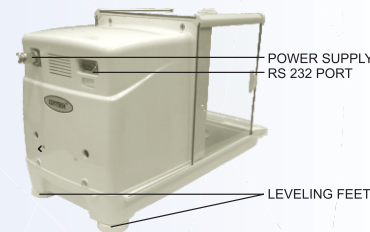

Customized, large, attractive LCD with Multiparameter display illuminated by white backlite

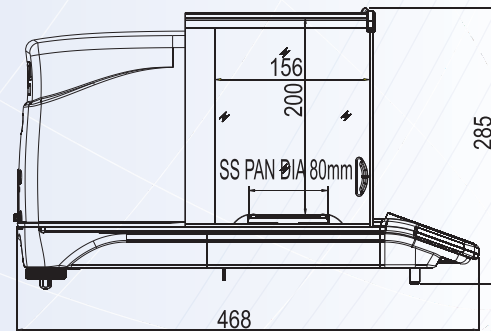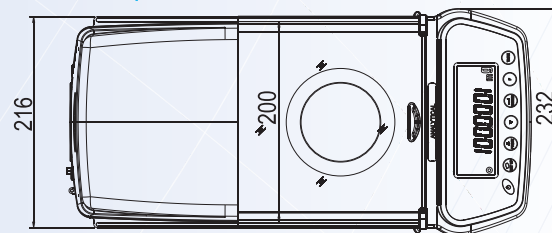

Indirect Loading Analytical / Semi Micro Balances without motorized internal calibration

Models	CAS-54	CAS-84	CAS-164	CAS-234	CAS-304
Capacity	50g	80g	160g	230g	300g
Readability	0.0001g	0.0001g	0.0001g	0.0001g	0.0001g
Repeatability (+)	0.1mg	0.1mg	0.2mg	0.2mg	0.2mg
Linearity (+)	0.2mg	0.2mg	0.4mg	0.4mg	0.4mg
Pan Size(mm)	100	100	100	100	100

The balance is supplied with Breeze shield as standard.

Indirect Loading Analytical / Semi Micro Balances with motorized internal calibration

Models	CAI-35	CAI-54	CAI-84	CAI-164	CAI-234	CAI-304
Capacity	30g	50g	80g	160g	230g	300g
Readability	0.00001g	0.0001g	0.0001g	0.0001g	0.0001g	0.0001g
Repeatability (+)	0.03mg	0.1mg	0.1mg	0.2mg	0.2mg	0.2mg
Linearity (+)	0.05mg	0.2mg	0.2mg	0.4mg	0.4mg	0.4mg
Pan Size(mm)	100	100	100	100	100	100

The balance is supplied with Breeze shield & Internal motorized calibration as standard.

Specifications :

Taring Range : Up to full capacity

Response time : 3-5 seconds

Power Req : 90-250V, 50/60Hz, 10 Watt

Operating Temperature : 10 to 45 deg C

All Specifications and designs are subject to change for improvement.

Optional Features

- ♦ Motorized internal calibration.
- ♦ RS 232 to USB interface converter.
- ♦ ISO GLP compliance.
- ♦ Real time clock (RTC).
- ♦ Density determination kit.
- ♦ Weigh below hook for density determination.
- ♦ Yarn count with temperature compensation.
- ♦ Denier measurement for silk & synthetic yarn.
- ♦ Cocoon assessment with statistical analysis for cocoons.
- ♦ Software for SQC (Statistical Quality Control) for Pharmaceutical Industries.



CONTECH
Instruments Ltd.
AN ISO 9001,14001 & OHSAS 18001 COMPANY

Where innovation never stops.....

301, Punit Indl. Premises, Turbhe Naka, Navi Mumbai - 400 705.

Tel. :+91 22 6139 3000 (100 lines)

Fax :+91 22 2761 8421

E-mail : info@contechindia.in / sales@contechindia.in

Website: www.contechindia.com



State Of The Art Manufacturing Plant